

FLASHFORGE CREATOR PRO 3D PRINTER

Give your design a real touch

New Generation Smart Dual Extruder 3D Printer

Physical Characteristics:

Build envelope (volume):

227 L X 148 W X 150 H mm (8.9" X 5.8" X 5.9")

Layer thickness (Z-resolution):

0.1-0.5mm

Build speed: 40-100mm/s

Printing Material: 1.75mm ABS
/PLA/PVA/HIPS

Printer Size: 476 x 332 x 383mm (18.7" x 13.1" x 15.1")

Printer Weight: 21.5kg (47.4 lbs)


Heated Build Platform: Yes

Connectivity: USB Cable, SD Card

Software: Flash Print

Extruder: Dual

Nozzle Diameter: 0.4mm

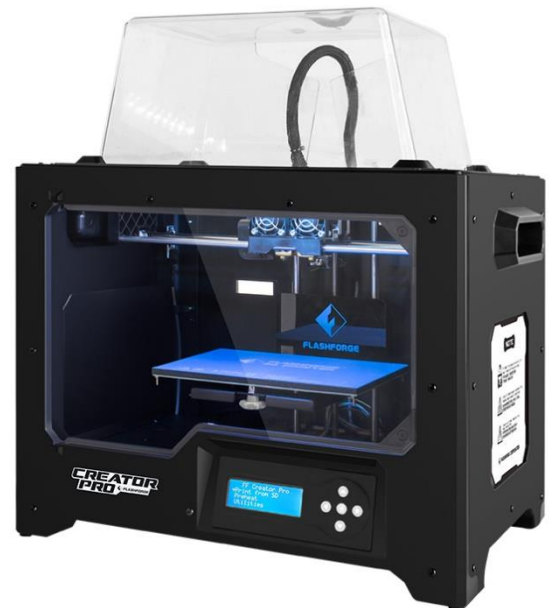

Specifications:

Power Requirement: 110-220VAC, 350W

Input Format: STL / OBJ

Operating Systems: Windows XP, Vista, 7, 8, 8.1 (32/64bit) & Mac OSX

Positioning Precision: 0.0025mm on Z axis, 0.01mm on XY axes

Operation requirement:

Extruder Temp.: Max. 230 °C

Heat Bed Temp.: Max. 120°C

Power Requirement: 110-220VAC, 350W

Why from Us:

- Local Warranty & Technical Support
- 1 Spool of ABS/PLA Filament

System requirement:

- i5 Processor, 2GB Graphics Card, OpenGL2.1

3D Spectra Technologies LLP

Flat No. 3, Punyanagari Co- Op Hsg Soc D- Wing,

Near Amrapali Petrol pump,

Off Bibwewadi Road, Bibwewadi Pune-411037

P: +91 20 24218090

M: +91 9623693654

E: sales@3dspectratech.com W: www.3dspectratech.com